

Fast-Flow peptide synthesis for scale-up

Fast-Flow peptide synthesis combines the benefits of continuous flow with the robustness of Fmoc/tBu solid-phase peptide synthesis.

Benefits of Fast-Flow synthesis using Peptide-Pilot over batch systems:



- Short synthesis times even at 30 mmol scale with Oxyma/DIC
- Reduced solvent consumption compared to batch SPPS
- Scale-up from lab scale with no further optimisation achieving identical crude purity
- Highest quality crude peptides only achievable using single-pass continuous flow
- Real time in-process data including precise timing of aggregation events
- Fully automated synthesis including side chain(s)
- Fast loading and unloading of reagents and resin

In 2017 Vapourtec developed the Variable Bed Flow Reactor (VBFR), the key technology enabling Fast-Flow peptide synthesis. This VBFR maintains the swollen resin at a consistent packing density, minimising its volume, thereby eliminating channelling of reagents and solvents and maximising washing efficiency.

Vapourtec has now strengthened its position in peptide drug discovery by developing a new state-of-the-art continuous flow peptide synthesiser for scale-up applications: **the Peptide-Pilot**.

The Peptide-Pilot can synthesise peptides of any sequence in the scale of 2 mmol to 30 mmol.

A 30-mer peptide will take 15 h to synthesise even at 30 mmol scale. The Peptide-Pilot is fully automated including, a solvent swap, side chain deprotection, such as the removal of Mtt groups with HFIP followed by coupling of side chains.


By utilising the R-Series platform and the Peptide-Pilot, users can synthesise peptides between 50 μ mol and 30 mmol yielding the same crude purity. Users can now optimise a process with just 200 mg of resin before running a 30 mmol synthesis, achieving similar purity.

Technical information per synthetic scale	50 μ mol	2 mmol	30 mmol
AA usage	3 to 5 eq	3 to 5 eq	3 to 5 eq
Cycle time	10 min	17 min	28 min
Solvent usage for a 29-mer	0.2 litres	5.2 litres	60 litres
Purity of 29-mer GLP-1 analogue	> 80 %	> 80 %	> 80 %
Compatible resins	PS, Tentagel, ChemMatrix		


Loading the VBFR on the R-Series (0.05-4 mmol)



Loading the VBFR on the Peptide Pilot (2-30 mmol)

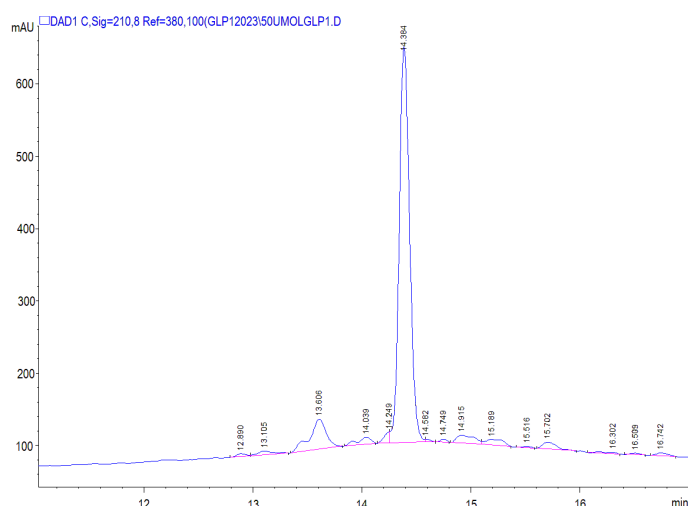Crude purity of 29-mer at 50 μ mol scale

Crude purity of 29-mer at 15 mmol

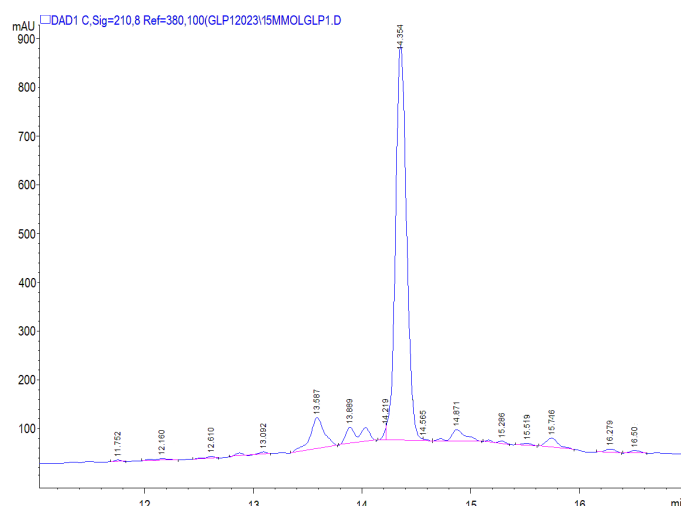

Technical Specifications

Synthesis scale	2 mmol	30 mmol
Resin loading	~ 9 g	~ 140 g
Type of resin	Compatible with a wide variety of resins (i.e. PS, PEG, etc.)	
Cycle time per residue	~25 minutes	
Solvent usage per cycle	0.2 litres	2.0 litres
30-mer synthesis time	~15 hours	
30-mer synthesis solvent usage	~5.2 litres	~60 litres
Space required	2.8m (w), 1.0m(d), 1.6m(h)	
Amino acid capacity	27 positions of 1 litre bottle	
DIC capacity	5 litres (1.6 M)	
DMF capacity	120 litres (3 x 40 litre refillable containers)	
Piperidine capacity	10 litres (neat)	
Formic acid capacity	1 litre (neat)	
Side chain addition	Automated solvent change and deprotection via HFIP	
DCM capacity	10 litres	
HFIP capacity	2 litres (solution)	
Minimum flowrate	10 ml/min	
Maximum flowrate	200 ml/min	
Maximum temperature	90 °C	
Real time analysis	UV/Vis, automatic Fmoc AUC and resin volume change	
Waste management	Option to connect to centralised waste drain system	

Software features

Sequence generator	Type ANY sequence of any length, up to 3 side chains
Coupling protocol	Five different tuneable coupling protocols
Deprotection protocol	Four different tuneable deprotection protocols
VBFR control	Adjustable packing density for different types of resins
Real time data	Flowrates, temperature, resin swelling and UV data
Real time analysis	Reactor volume and UV data are analysed after each cycle
Remote notifications	A SMTP protocol is built in the software to email users
User/Super User level	Two levels of access to safeguard protocols
Reagent monitoring	Reagent and solvent quantities are continuously monitored



About Vapourtec

Vapourtec is the world's leading manufacturer of flow chemistry equipment. Founded in 2003, Vapourtec has been at the forefront of the flow chemistry industry ever since.

Headquartered in Bury St Edmunds, UK, Vapourtec design and manufacture the R-Series flow chemistry system that has empowered chemists throughout the world to further scientific discovery.

Trusted by academics, chemists and manufacturers around the world, the modular R-Series system has revolutionised the way many deliver the research, chemicals and products we all rely on today.



World class



Innovative



Precise

vapourtec
precision flow chemistry

+44 (0) 1284 728659

info@vapourtec.com

www.vapourtec.com